

PICOSECOND LIGHT PULSER PLP-10

High repetition up to 100 MHz

Wavelength range from 375 nm to 1550 nm



The picosecond light pulser PLP-10 is an ultrashort pulsed light source that utilizes a laser diode (LD) head. It consists of a controller and an LD head. Twelve LD head types are available to accommodate various wavelengths, enabling optical output over a broad wavelength range of 375 nm to 1550 nm.

The PLP-10 is ideal for frequency characteristics evaluation of POF optical communications, response characteristics evaluation of a photodetector device, and an excitation light source of a fluorescence lifetime measurement system.

Optical output is selectable from a window output or FC connector output.

FEATURES

- Ultrashort pulses with FWHM of 100 ps or less
- High-repetition frequency up to 100 MHz
- Stable output power and oscillation timing
- Easy handling and maintenance free operation
- Built-in trigger delay

APPLICATIONS

- Frequency characteristics evaluation of POF and Gigabit Ethernet optical fiber
- Pulse response measurement of high-speed photodetectors
- Record evaluation of an optical recording medium
- Excitation light source for fluorescence lifetime measurements

HAMAMATSU

SPECIFICATIONS

● M8903 Laser diode head

- Output form type: window: PLP10-xxx / FC connector (for multi-mode optical fiber) : PLP10-xxxC

Parameter		Unit	PLP10-038	PLP10-040 PLP10-040C	PLP10-044 PLP10-044C	PLP10-047 PLP10-047C	PLP10-063 PLP10-063C	PLP10-065 PLP10-065C	PLP10-078 PLP10-078C	PLP10-085 PLP10-085C	PLP10-098 PLP10-098C	PLP10-130 PLP10-130C	PLP10-155 PLP10-155C
Emission wavelength		nm	375	405	440	470	635	650	780	850	980	1300	1550
Wavelength tolerance		nm	<±10	<±10	<±10	<±10	<±10	<±10	<±20	<±10	<±20	<±30	<±30
Spectral half-width		nm	<10	<10	<10	<10	<5	<5	<10	<5	<20	<10	<20
Pulse width	max.	ps	100	100	150	180	110	100	120	100	100	100	100
	typ.	ps	80	70	100	130	90	70	100	70	70	70	70
Beam divergence angle*		θ _⊥	deg.	15	16	13	7	10	8	9	12	30	25
		θ _∥	deg.	30	34	28	22	35	27	17	32	40	30
Peak power	Window output	typ.	mW	70	100	80	80	70	50	70	100	100	20
		min.	mW	30	50	40	40	30	20	30	50	50	10
	FC connector output	typ.	mW	-	50	20	20	30	20	30	50	50	10
		min.	mW	-	25	10	10	10	8	10	25	20	5

*Measured using a window output type.

Note: Measured with 100 MHz. The values can be changed depending on the frequency. The PLP head should be selected according to wavelength and output form and can be exchangeable with the controller C8898.

● C8898 Controller


- Repetition frequency (Hz)
 - Internal trigger 100 MHz, 50 MHz, 20 MHz, 10 MHz, 5 MHz, 2 MHz, 1 MHz, 500 kHz, 200 kHz, 100 kHz, 50 kHz, 20 kHz, 10 kHz, 5 kHz, 2 kHz, 1 kHz, 500 Hz, 200 Hz, 100 Hz, 50 Hz, 20 Hz, 10 Hz, 5 Hz, 2 Hz
 - External trigger Single shot to 50 MHz
- External trigger input
 - Amplitude - 4 V to + 4 V (50 Ω)
 - Minimum pulse width 10 ns
- Synchronous trigger output
 - Amplitude (Selectable) + 2 V to + 3 V (50 Ω)
or - 500 mV to - 700 mV (50 Ω)
 - Pulse width 5 ns ± 3 ns
 - Timing before or after optical output (selectable)
 - Delay time to (reference time) ±Δt; Δt= 0 ns, 20 ns, 40 ns, 60 ns
80 ns 100 ns
- Line voltage 100 V AC to 240 V AC 50 Hz/60 Hz
- Power consumption 90 W VA

● Common specifications


- Ambient operating temperature +10°C to +30°C
- Ambient storage temperature -10°C to +50°C
- Ambient operating/storage humidity ... 70% or less (non-condensing)

DIMENSIONAL OUTLINES (Unit: mm)

● M8903 Laser diode head (approx. 0.9 kg)

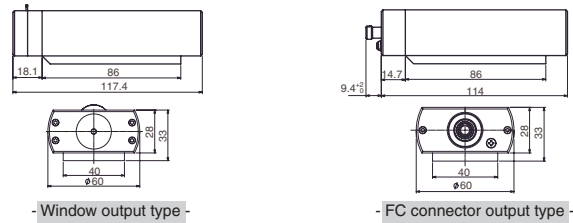

● C8898 Controller (approx. 5.1 kg)

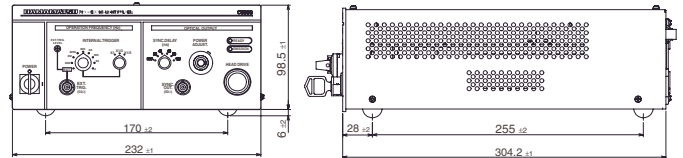

LASER SAFETY

Conforming to international laser safety standards (USA: 21 CFR 1040.10 CDRH, other areas: IEC 60825-1), which obligate manufacturers to provide preventive safety measures, Hamamatsu lasers are classified, and appropriate safety measures and labeling are provided. During operation, users must also use their preventive safety measures according to laser-related regulations.

● Labels

Hamamatsu model PLP-10 uses lasers to be classified, Class 3B.



Description Label (Sample)

Caution Label



★ Product and software package names noted in this documentation are trademarks or registered trademarks of their respective manufacturers.

- Subject to local technical requirements and regulations, availability of products included in this promotional material may vary. Please consult with our sales office.
- Information furnished by HAMAMATSU is believed to be reliable. However, no responsibility is assumed for possible inaccuracies or omissions. Specifications and external appearance are subject to change without notice.

© 2006 Hamamatsu Photonics K.K.

HAMAMATSU

Homepage Address <http://www.hamamatsu.com>

HAMAMATSU PHOTONICS K.K., Systems Division

812 Joko-cho, Hamamatsu City, 431-3196, Japan, Telephone: (81)53-431-0124, Fax: (81)53-435-1574, E-mail: selesi@sys.hpk.co.jp

U.S.A. and Canada: Hamamatsu Photonic Systems: 360 Foothill Road, Bridgewater, N.J. 08807-0910, U.S.A., Telephone: (1)908-231-1116, Fax: (1)908-231-0852, E-mail: usa@hamamatsu.com

Germany: Hamamatsu Photonics Deutschland GmbH: Arzbergerstr. 10, D-82211 Herrsching am Ammersee, Germany, Telephone: (49)8152-375-0, Fax: (49)8152-2658, E-mail: info@hamamatsu.de

France: Hamamatsu Photonics France S.A.R.L.: 19, Rue du Saule Trapu, Parc du Moulin de Massy, 91882 Massy Cedex, France, Telephone: (33)1 69 53 71 00, Fax: (33)1 69 53 71 10, E-mail: infos@hamamatsu.fr

United Kingdom: Hamamatsu Photonics UK Limited: 2 Howard Court, 10 Tewin Road, Welwyn Garden City, Hertfordshire, AL7 1BW, U.K., Telephone: (44) 1707-294888, Fax: (44) 1707-325777, E-mail: info@hamamatsu.co.uk

North Europe: Hamamatsu Photonics Norden AB: Smidesvägen 12, SE-171-41 Solna, Sweden, Telephone: (46)8-509-031-00, Fax: (46)8-509-031-01, E-mail: info@hamamatsu.se

Italy: Hamamatsu Photonics Italia S.R.L.: Strada della Moia, 1/E 20020 Arese (Milano), Italy, Telephone: (39)02-935 81 733, Fax: (39)02-935 81 741, E-mail: info@hamamatsu.it

Cat. No. SOCS0003E04

AUG/2006 HPK

Created in Japan (PDF)